

Approved Replacement Turbocharger

5303-970-0623 / 5303-970-0634 / 5303-970-0394



IMPORTANT

5303-970-0623 IS THE APPROVED REPLACEMENT.

It supersedes both 5303-970-0634 and 5303-970-0394.

The previous turbochargers had different applications:

- 5303-970-0634 – Suitable for PSA/Vauxhall vehicles only. Not suitable for Ford applications due to a missing compressor housing boss.
- 5303-970-0394 – Used for Ford applications but experienced production issues.


In addition, both turbochargers use different VTG (variable turbine geometry) designs and therefore different turbine housings.

Solution

The new 5303-970-0623 combines the correct features of both previous versions:

- Turbine housing and actuator from 5303-970-0634
- Compressor housing with two mounting bosses, as used on 5303-970-0394

5303-970-0623 supersedes both previous part numbers.

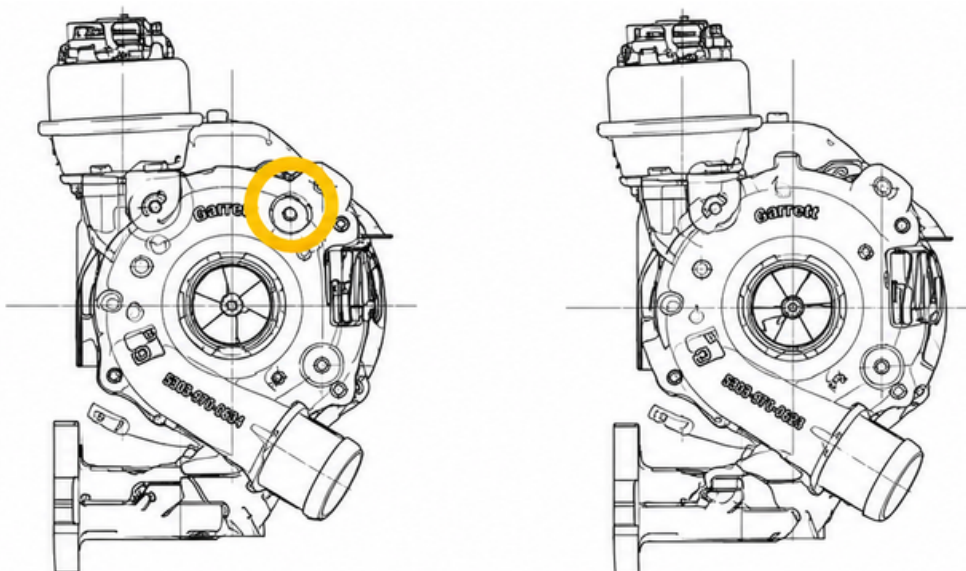

NEED TECHNICAL SUPPORT?

Unsure which turbocharger you need or have a technical query?

Our experienced technical team is on hand to help identify the correct turbocharger and provide expert advice before you order.

 Call: 0148 345 345

 WhatsApp: 07760 518 557